

- DIRECT-IT IN (UAA1)
- DIRECT-IT (UAA2)

IMPORTANT Read These Instructions Before Use & Save Instructions & Packaging

Specifically developed to target areas that need high air exchange rates. Sets up in minutes. Replace fewer walls & ceilings. Dries beneath and behind cabinets and stairwells.

All components are heavy duty industrial quality for extra long life. Both are capable of drying 24 linear feet.

The Direct-It IN (UAA1) attaches to the front of most standard airmovers.

The Direct-It (UAA2) attaches positively or negatively to 12, 14, 16 & 18 inch duct rings



IMPORTANT Safety warnings are located on page 2.

SAFETY WARNINGS



WARNING: SERIOUS INJURY CAN RESULT FROM FAILURE TO FOLLOW THESE SAFETY GUIDELINES

Wear ANSI rated protective eyewear when handling any product that has bungee cords. Especially when stretching, fastening or releasing hooks.

Inspect cord before use. Do not use if cord is frayed or hooks are bent or damaged.

Do not stretch cord more than 50%. (Example 12" to max 18"). Cords can be stretched more than 50%, but could cause failure of cord or hook & result in serious eye or other injury.

Cord acts like a rubber band. To avoid being struck by hooks, do not stretch cord toward or away from you . Pull to one side and keep your face and body away from rebound path.

GRAY & BLACK WATER

Operators should always follow current IICRC S500 Water Damage Restoration Standards.

CAUTION

Use extreme caution when drilling into a wall, cabinet or any other material as their may be electrical or plumbing hazards hidden from view. Possible injuries could result.

TABLE OF CONTENTS

INTRODUCTION.....	1
SAFETY AWARNINGS.....	2
DIRECT-IT IN (UAA1).....	3
DIRECT-IT IN PACKING LIST.....	3
DIRECT-IT (UAA2).....	4
DIRECT-IT PACKING LIST.....	4
WALL PENETRATOR.....	5
SUGGESTED HOSE LENGTHS.....	5
WARRANTY.....	5
CUSTOMER SERVICE.....	5


DIRECT-IT IN (UAA1)

For use with most standard airmovers on the market today. This adapter dries positively by moving dry air into trapped spaces.

It is recommended that the drying device be set up at the center of the drying run. Install in a safe manner. Keep aisles clear and always reduce any unnecessary trip hazards. Set up warnings if trip hazards exist.



Stair Drying

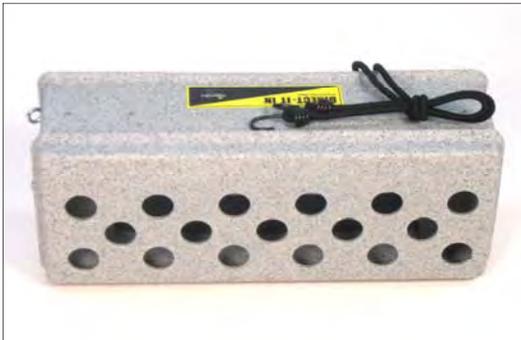

DIRECT-IT IN PACKING LIST

Description	Qty	Part # (if ordering separately)
Direct-It IN (UAA1)	1	UAA1-AO
1.25 x 50 ft hose	3	PL05
5/8" Wall Penetrators	17	WP2
Carry Bag	1	CB1
Operations Manual	1	



IMPORTANT Safety warnings are found on page 2.

DIRECT-IT (UAA2)

The newly designed Direct-It, now works with axial fans, air scrubbers or other collared drying devices that fit duct ring sizes of 12", 14", 16" & 18". The adapter can be attached to dry either positively or negatively.

The back of the Direct-It resembles a set of stair steps, and will simply slip into the correct size opening of your drying equipment.



Wall Drying



Cabinet Drying

When drying negatively using an airscrubber, the Direct-It may be positioned on top without bungee cord attachment.



DIRECT-IT PACKING LIST

Description	Qty	Part # (if ordering separately)
Direct-It (UAA2)	1	UAA2-AO
1.25 x 50 ft hose	3	PL05
1.25 Hosecuffs	17	HC1
5/8" Wall Penetrators	17	WP2
Carry Bag	1	CB1
Operations Manual	1	



IMPORTANT Safety warnings are found on page 2.

WALL PENETRATOR

This part is black in color. It will slide into the end of the 1 1/4" hose or into a 1 1/4" Hose Cuff. The business end of the Penetrator is 5/8".

We **HIGHLY RECOMMEND** using an adjustable drill stop. The depth of drill penetration will be based upon the thickness of material being drilled. The drill should be stopped from penetrating hidden wall components such as electrical wires or plumbing pipes. Use a 11/16" paddle bit for the 5/8" Wall Penetrator.

SUGGESTED HOSE LENGTHS

The hose is shipped blank, allowing the technician the freedom to choose whatever lengths make the most sense.

Be cautious when cutting the hose with sharp instruments. Always cut away from yourself and not towards anything that you aren't willing to cut if your hand were to slip. Put the hose on a surface such as plywood or OSB to avoid damaging surfaces beneath the hose.

Extra hoses sections are available for purchase (Item # PL05).

WARRANTY

DIRECT-IT / DIRECT-IT IN - 1 Year

Limitations & Exclusions: This warranty will not extend to Injectidry products showing any accidental damage, alteration, normal wear, disassembly, lack of proper maintenance, damage from fire or flood, damage from corrosive or other chemicals, improper voltage use, unauthorized repairs, use of non-genuine parts and materials, misuse, or any other causes beyond the control of Injectidry. The warranty obligation extends only to the repairs or replacement of parts found to be defective upon the examination and the decision of Injectidry Systems.

The preceding limitations constitute the entire warranty. No other warranty or responsibility is expressed or implied. The warranty includes legal rights to the original purchaser, and additional rights may be available, varying state to state. In addition, Injectidry Systems Repair Department must authorize all incoming products and/or repair work to be completed by an authorized repair center. Injectidry Systems is not responsible for any repairs or modifications to any of its products, unless completed by Injectidry Systems or an authorized service center. We are not responsible for subsequent damaged caused by the user and or its agents.

CUSTOMER SERVICE

Return for Repair Request: You can obtain a Request for Repair Form by calling 800.257.0797 or by going to our website for a form on the "Contact Us" page.

Return Request: You can obtain a Request for Return Form by calling 800.257.0797 or by going to our website for a form on the "Contact Us" page.

Incomplete Shipments: All shortages must be reported within five business days.

Be sure to check the number of cartons or packages. You can compare this count with the total listed on Bill of Lading. Confirm that you have received all cartons or packages pertaining to this shipment.

If quantities do not match, have the delivery driver note shortage. If the missing cartons or packages do not show up in the next few days, contact the Shipping Department and we will reship on a new order.

You must file a Freight Claim for shorted packages if the count differs from the Bill of Lading. For your protection, the carrier who delivers merchandise to your door is responsible for any loss or damages. Acceptance of the shipment by the carrier company is acknowledgement that the articles were delivered to them were in good condition and properly packaged.

Freight Damage: Orders are shipped Freight on Board (F.O.B.) from our warehouse in Lynnwood, WA. If the customer has chosen to ship the order with their own account and or carrier, the customer will be responsible for the filing of the freight damage claim. If the customer chose to use Injectidry's account/carrier, Injectidry will file the freight damage claim. All freight damage should be reported to the Injectidry Shipping Department immediately upon discovery.

Inspect your shipment upon delivery. Have the driver note all visible damage on the waybill before you sign. If the discovery of damage is found after the driver has left immediately call the carrier.

Injectidry chooses our carriers carefully and strives for your equipment to be delivered in a timely and undamaged condition. If a mistake happens we do all we can to communicate the problem with the carrier so that it is not repeated. Please let us know immediately if you have any problems.

