

Oil Capacity: Maximum 11.1 Quarts / Minimum 6.3 Quarts  
 Use 10W-30, 15W-40 or 20W-50  
 Quality oil rated API CF or higher  
 Oil Filter: 119005-35151 or 129150-35153

Coolant Capacity: 4.4 Quarts  
 Use Long Life Coolant (LLC) or Extended Life Coolant (ELC)  
 Rating must meet or exceed:  
 ASTM D6210, D4985  
 SAE J814C, J1941, J1034 or J2036


Fuel Tank Capacity: 100 Gallon  
 Diesel Fuel - No. 1D S15, S500 or No. 2D S15, S500  
 ASTM D975  
 ISO 8217 DMX  
 Fuel Filter: 119802-55801  
 Fuel Water Separator Mesh Element: 119802-55710

Air Cleaner Element: PWM-P827653

V-Belt: Mitsubishi REMF 6410 or Gates 9420

Cooling Fan V-Belt

Air Cleaner

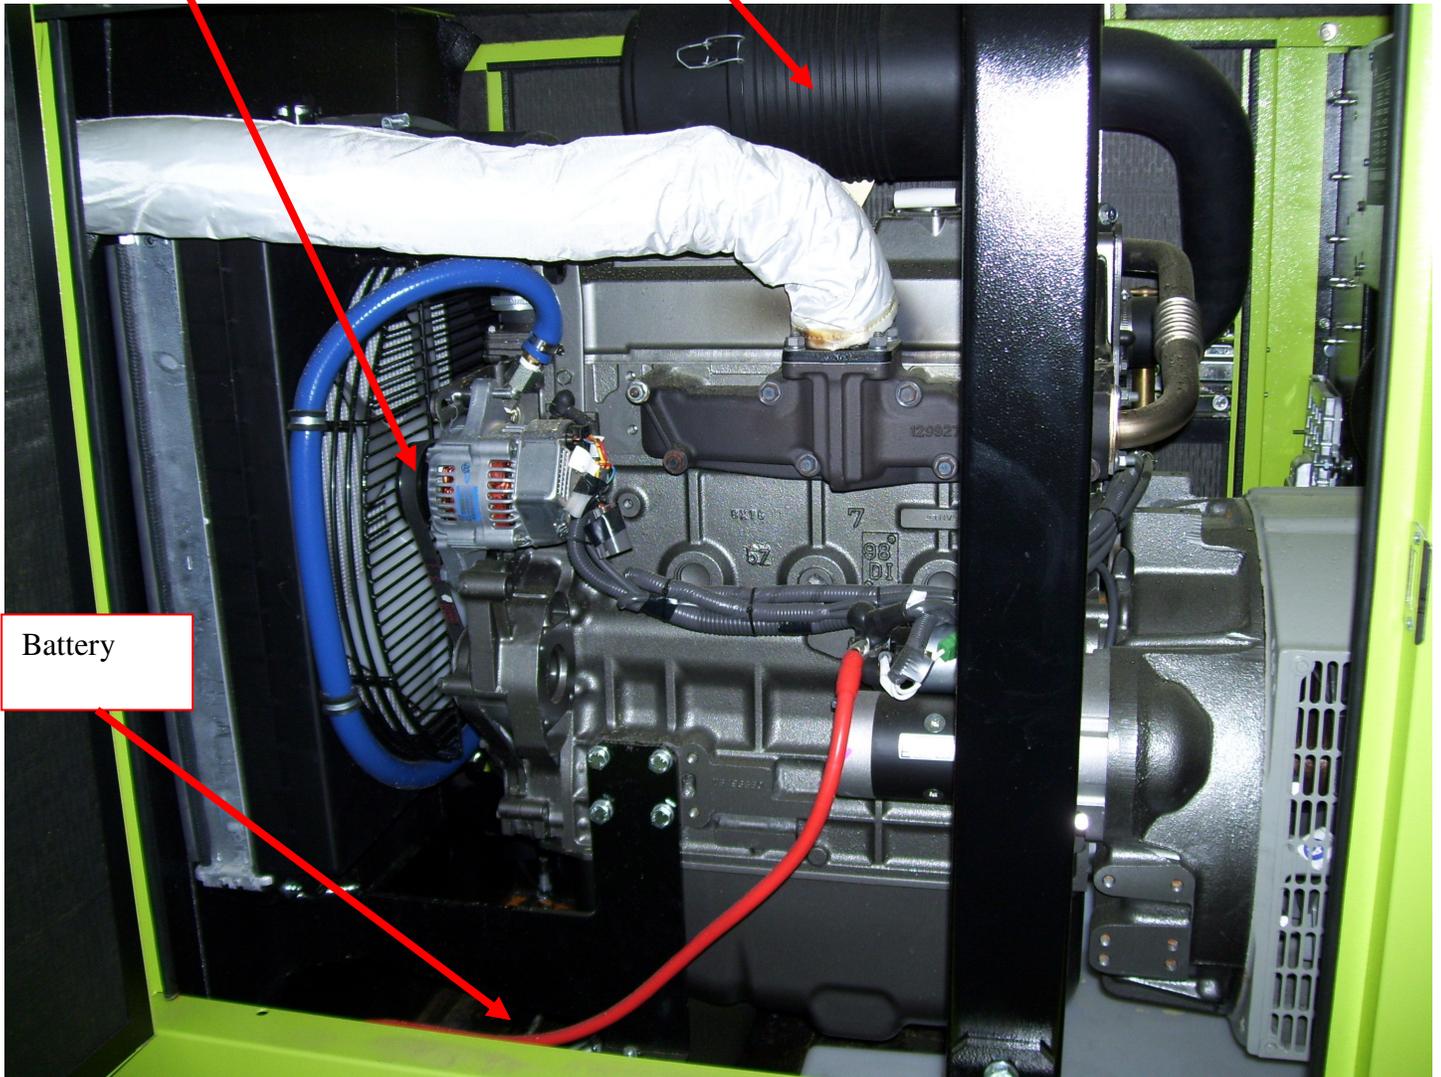

Battery