


# SPRAYER

EN Instructions for use




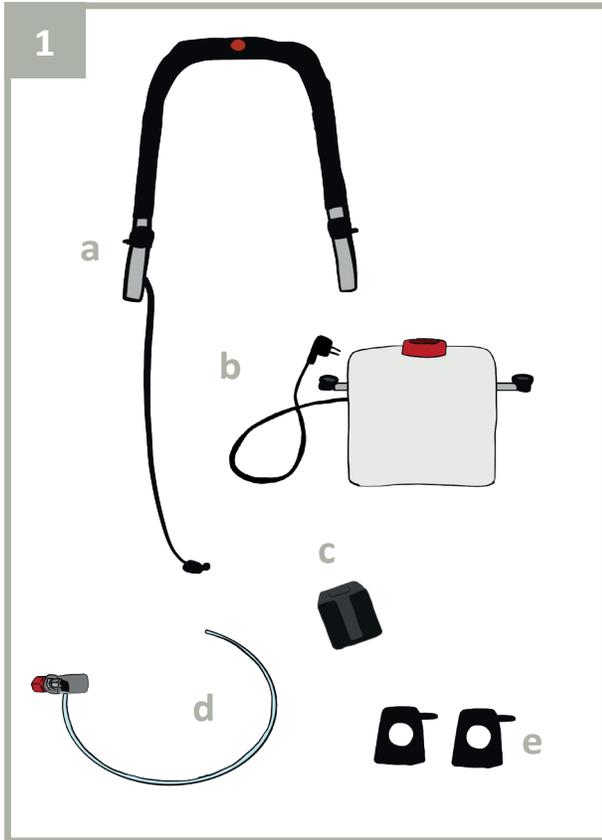

CONTENTS (Fig. 1)

- a. 1 upper handle with red button and black power cord
- b. 1 tank with electric pump
- c. 1 sprayer mount
- d. 1 sprayer nozzle with hose
- e. 2 rubber brackets

*Note: Two upper handle connectors and one bottom handle bracket are required to complete this set up (not included).*

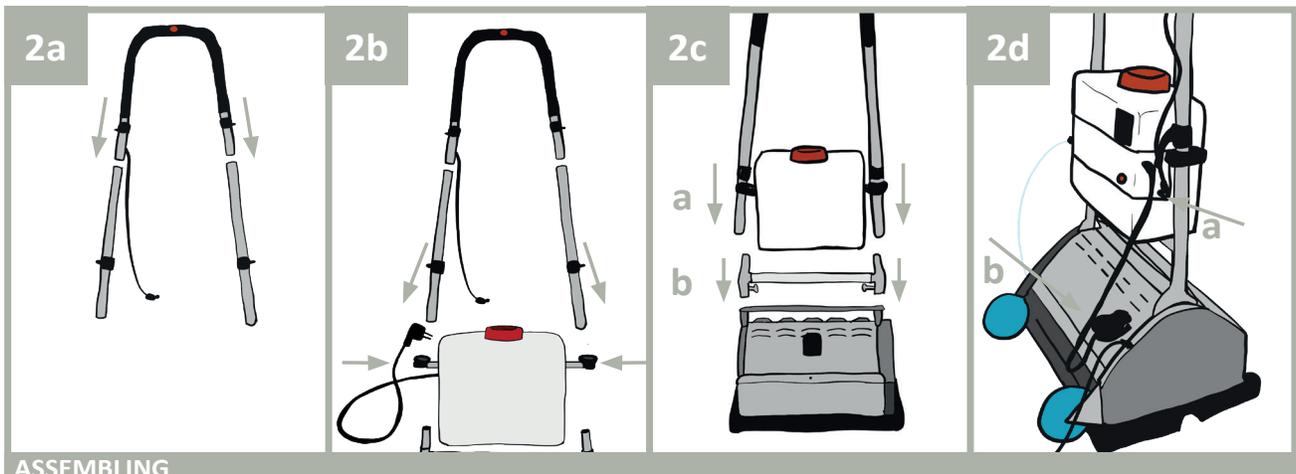


**ASSEMBLING**

Install handle top on the handle uprights, ensure red trigger button is facing the operator.

Insert the two rubber brackets to the sides of the tank. Slide both handle uprights downward through the mounting rubber brackets on the side of the tank.

- a. Install bottom handle bracket on the machine.
- b. Install handle on the bottom handle bracket.


- a. Attach power cable from the handle on the tank.
- b. Attach main power cable to the port on rear of the machine.

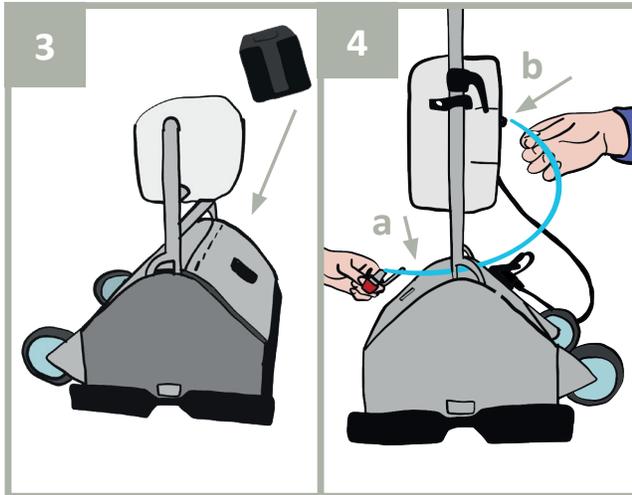

## ASSEMBLING


Attach sprayer mount centered to front of machine on motor cover (Fig 3).

- Attach sprayer nozzle onto mount (Fig 4).
- Insert supply hose from nozzle into the sprayer outlet port on rear of tank (Fig 4).

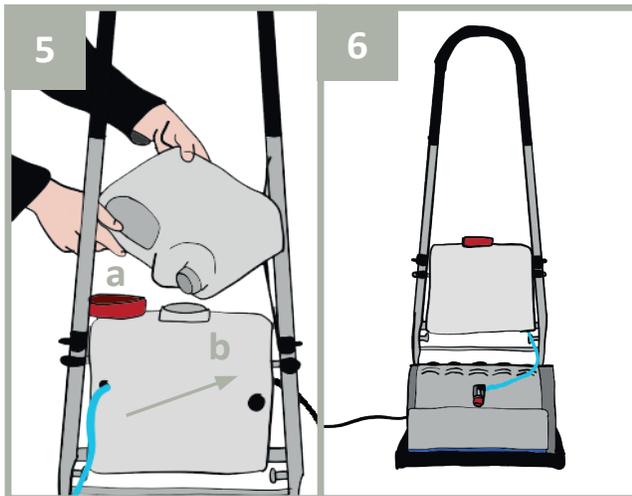


## SPRAYER OPERATION

- Fill tank with cleaning liquid (Fig 5).
- Turn on power switch located on rear of tank.

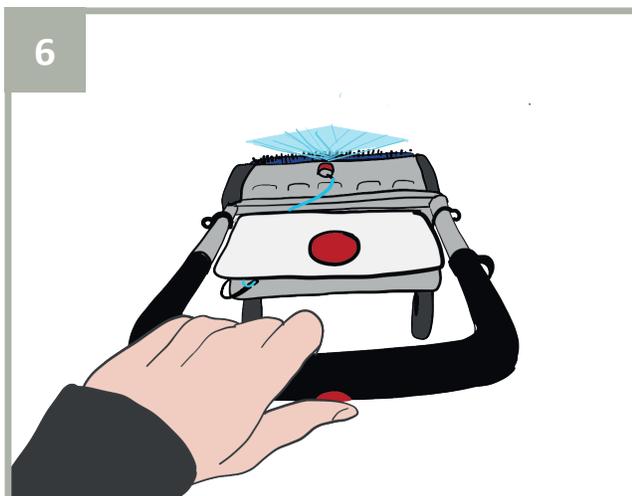

## SPRAYER OPERATION

Press red trigger button on top bottom of handle to activate sprayer pump.

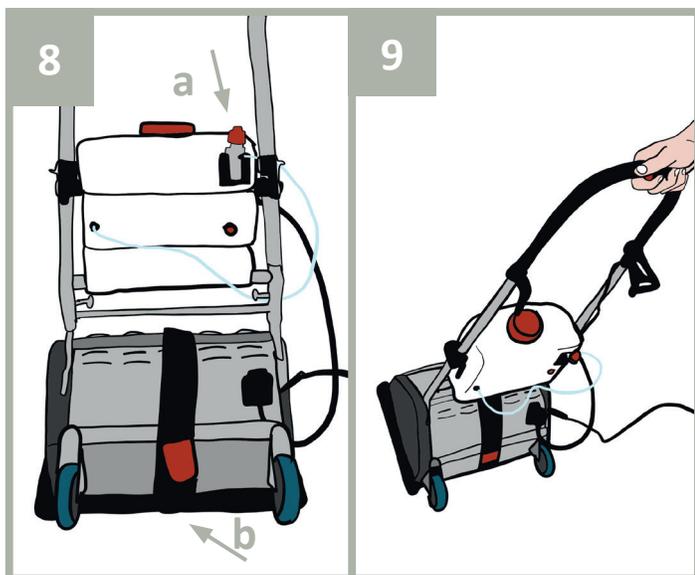

### TRANSPORT

Remove sprayer nozzle from the mount of the motor cover.

- a. Attach sprayer nozzle onto mount on the tank (Fig 8).
- b. Attach the machine with the belt on the transport tray/ trolley. Transport the machine as usual.

## TROUBLESHOOTING

### TROUBLESHOOTING

Note - Once assembled per instructions and pump does not work, check all connections to see if machine has power.

If machine runs but pump does not, check power connectors on the pump inside pump housing located on rear of tank. If still not powered, double check the power outlet on rear of machine to ensure it is supplying necessary power.