



SPECIFICATIONS


Part Number	100152
Maximum Pressure For Pulse Pump	1500 PSI
Max. Pressure w/ Ball Valve Closed	3000 PSI
Ports Sizes:	Inlet 1/8"-27 NPT-F Outlet 1/8"-27 NPT-F Pulse Port 3/8" NPT-F
Dimensions	3" x 3.55" x 4.42"
Weight	3.0 lbs.
Materials	303 Stainless Steel

*Flow will vary according to flow and pressure of the drive pump. For optimum performance inlet pressure to the drive pump should be zero or negative but not to exceed drive pump specifications.

FEATURES

- 303 Stainless Steel body
- NBR diaphragm offers resilience and chemical compatibility
- Mounts to one of the drive pump inlet valve ports by using a special valve adapter
- Draws cleaning solution with each stroke of the drive pump
- Permits cleaning solution application at system pressure up to 1500 PSI
- Integrated ball valve allows shut-off when using water pressure up to 3000 PSI

PARTS LIST

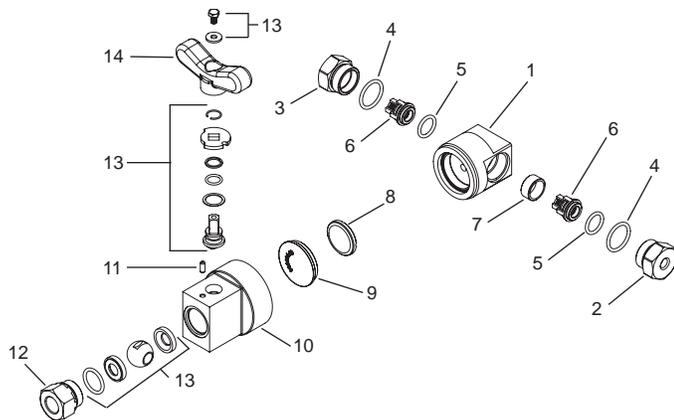



No.	Part Number	Description	Qty.
1.	520193	Body, Pulse Pump	1
2.	520196	Valve Cap, Pulse Pump Inlet	1
3.	520195	Valve Cap, Pulse Pump Outlet	1
4.	701004	O-ring, .862 x .103	2
5.	701114	O-ring, .612 x .103	2
6.	103074	Valve, Pulse Pump	2
7.	520194	Spacer Ring	1
8.	660180	Plastic Disc	1
9.	700033	Rubber Diaphragm	1
10.	520270	Pulse Pump Cap w/Ball Valve	1
11.	520271	Rotation Stop Pin	1
12.	520269	Fitting	1
13.	190445	Ball Valve Kit	1
14.	450035	Handle	1

VALVES & ADAPTERS

PUMP SERIES	ADAPTER FITTING	VALVE ASSEMBLY
60 (TC, HTC)	520275	103036
44 (EZ)	520273	103036
63 (TX, HTX)	520273	103036
47 (HTS)	520274	103035
66 (HTF)	520276	103090

INSTALLATION INSTRUCTIONS


From the drive pump remove one of the standard inlet valve plugs and it's valve assembly and install the special valve assembly with a through hole in the plastic cage and install the special adapter with a 3/8"-18 NPT Male threads that is appropriate for the drive pump and tighten to proper torque. Thread the pulse pump pulse port 3/8"-18 NPT Female onto the special adapter 3/8"-18 NPT Male and tighten until the pulse pump inlet and outlet ports are at desired position. Install pulse pump inlet and outlet according to diagram.

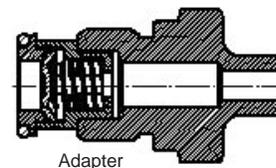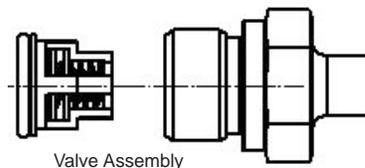


100152 GP Pulse Pump

CUTAWAYS & OPERATION


SUCTION

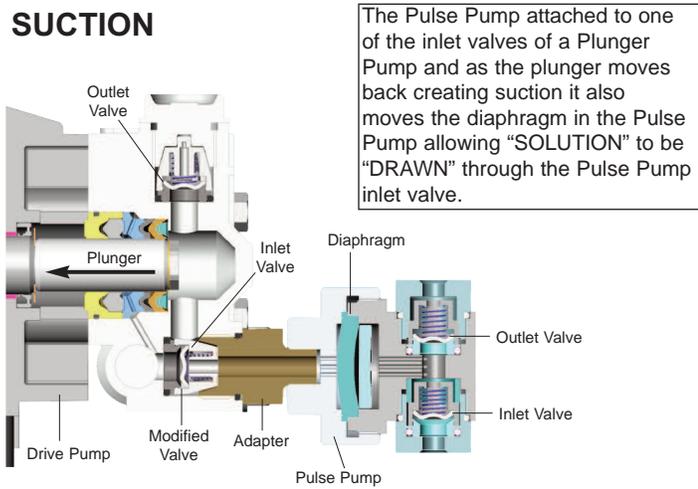

DISCHARGE

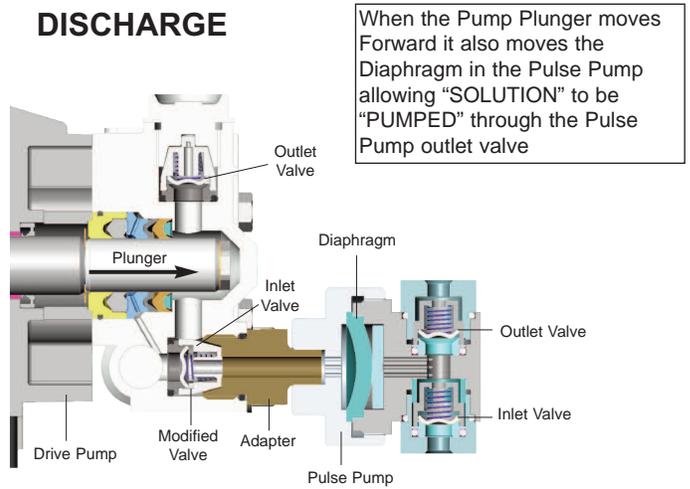

SYSTEM DIAGRAM

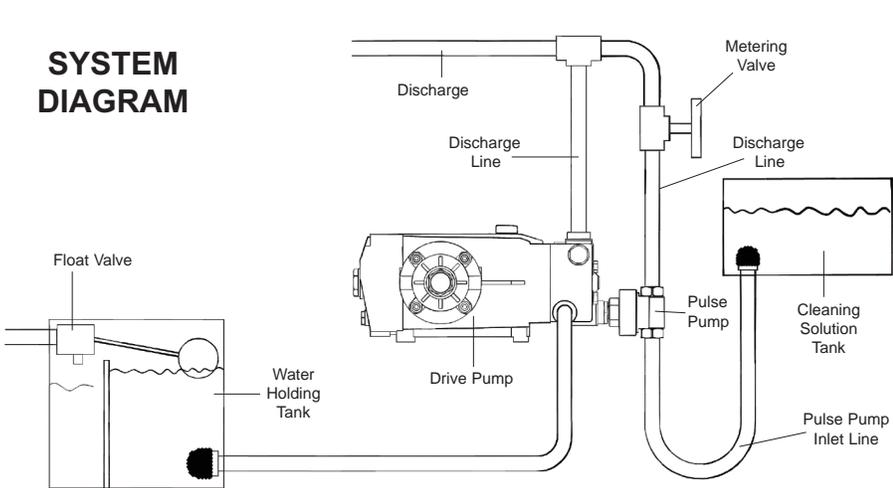

Pulse Pump will not draw cleaning solution with a pressurized inlet to the drive pump. For optimum performance inlet pressure to the drive pump should be zero or negative but not to exceed drive pump specifications.

To adjust the amount of cleaning solution drawn into the system, install a metering valve in the discharge line of the pulse pump.

The pressure limit of 1500 PSI is due to the diaphragm.

START-UP INSTRUCTIONS

With the drive pump open and pulse pump metering valve open (no back pressure), start drive pump. After water starts to flow from system check to be sure the pulse pump is primed and pumping. Then install nozzle and set drive pump pressure to desired discharge pressure. After the unit is operating, adjust metering valve to obtain desired water/cleaning solution ratio.

Mixing ratio varies with output of drive pump.

TROUBLESHOOTING

No cleaning solution supply from Pulse Pump:

- System not primed
Airlock between drive pump and pulse pump diaphragm
Airlock in pulse pump inlet line
- Failure of diaphragm
- Foreign material in Pulse Pump inlet and outlet valve

Limited cleaning solution supply from Pulse Pump:

- Restriction between drive pump and pulse pump
- Restriction in metering valve
- Worn inlet and outlet valves

Ref 300682 Rev. B
12-09

