



Dust Containment Systems

HEAVY-DUTY INDUSTRIAL VACUUM


8-54DCG1

Blastrac® Dust Collectors are designed specifically for the rigors of working with concrete, masonry/tile mortar, and asphalt materials to reduce the amount of debris and dust generated on surface preparation job sites. This reduction creates environmentally friendly work conditions, helps diminish operator fatigue, minimizes health issues, and allows work on simultaneous projects.

The 8-54DCG1, an eight cartridge, auto-pulse industrial vacuum, is preferred by professional contractors requiring continuous operation and high performance. It is designed to maintain productivity with a powerful motor for increased air flow, heavy-duty filters, and components that are protected from dust and debris for longer life.

An 11 second auto-pulse cleaning system helps prolong filter life, as the 8-54DCG1 delivers a maximum airflow of 1,650 cfm and static pressure of 21 inches. The cam-lock, high-capacity dust bin features castors and handles for ease of transport and debris disposal.

The 8-54DCG1 greatly reduces airborne dust and particulate and withstands the demands of heavy commercial or surface-prep contractor use, to provide a cleaner and safer work environment.

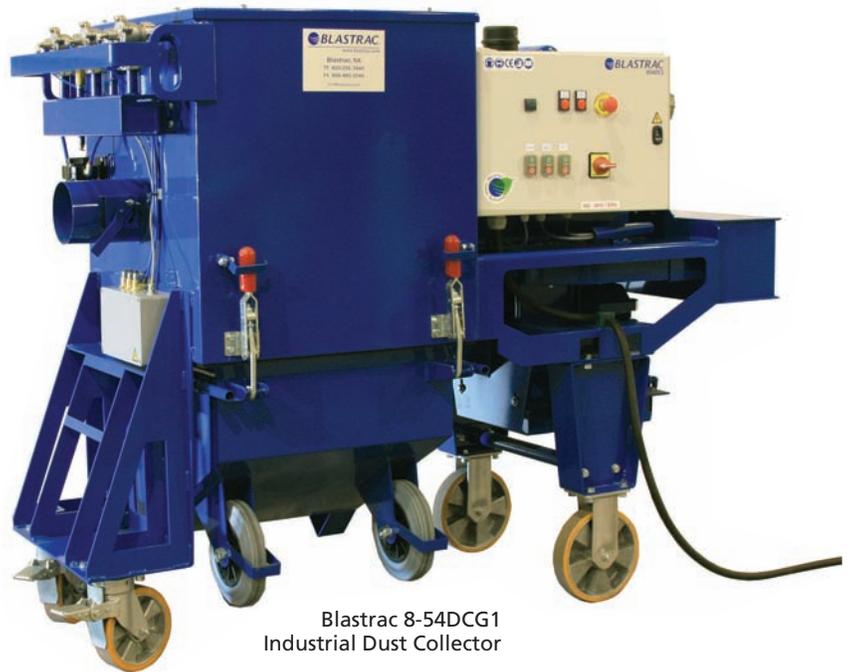

Blastrac 8-54DCG1
Industrial Dust Collector



Cam-lock,
high-capacity
dust bin with large wheels
and handles for ease of transport and debris disposal

Blastrac 8-54DCG1

FEATURES & BENEFITS:

- New 4 wheel design for more stability
- Eight cartridge filter system provides for comfortable, dust-free working
- Auto-pulse cleaning, with 11-second pulses prolongs filter life
- Unit features an available electrical outlet on dust collector & keeps connection to on-site power through a single cord
- Durable steel construction
- Cam-lock, high-capacity dust bin
- Electrical overload safety
- Bin features large wheels and handles for ease of transport and debris disposal

SPECIFICATIONS:

Static Pressure: Maximum 21 in H₂O
Air Flow: 1,650 cfm maximum
Dust Bin Capacity: 420 lbs (191kg)
Amperage: 14.2A
Voltage: 440V 3 ø, 60 Hz
Power Cord: 75 ft. (23m)
Dust Hose Connection: 6 in. (152.4mm)
Dimensions: L 75 in. (1905mm) x
W 42 in. (1067mm) x H 58 in. (1473mm)
Weight: Net 1,235 lbs (560kg)

Always wear appropriate eye, ear and respirator protection for the application, as specified by OSHA regulations and your employer. Never operate or maintain equipment before reading and understanding the instructions for operation and maintenance. Obey all safety signs and instructions while operating or maintaining equipment.

Products manufactured and marketed by Blastrac/Diamatic are protected by patents issued or pending in the United States and other countries. Blastrac/Diamatic reserves the right to change the specifications referred to in this literature at any time, without prior notice. Blastrac and Diamatic are registered trademarks owned by Blastrac, NA.

Trust the Original Surface Preparation Experts
BLASTRAC®

800.256.3440 • blastrac.com

2054 05/11 © 2011 Blastrac, NA All rights reserved.