

specifications

Motor:
120V, 1 1/2 HP, 60 Hz,
DC Rectified for AC Operation
w/ Carbon Brush Wear
Indicator Light
Gears: 3 Idler - 11.1 Ratio
Drive Speed: 140 RPM
Power Cord:
50 Ft., 14/3 Wire Grounded,
Safety Yellow

MCL-17E DLX (326569)

MCL-17E STD (328375)

Brush Size: 17"

Wheels: 5" Transport

MCL-20E DLX (411086)

MCL-20E STD (353515)

Brush Size: 20"

Wheels: 5" Transport

MCL-24E DLX (335053)

MCL-24E STD (411094)

Brush Size: 24"


Wheels: 4" Transport

DLX Models Include:

AMP Meter; Oversize Handle Grips; "Select-A-Weight"[™]; Solution Tank; Showerfeed Pad Driver; Showerfeed Diamond Disc Driver w/"Splash-Guard"[™]

STD Models Include:

AMP Meter; Oversize Handle Grips; "Select-A-Weight"[™]

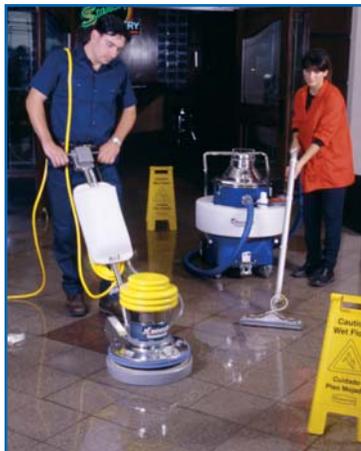

Oversize Handle Grips

For operator's comfort.

Heavy-Duty Switch

Set in a die cast aluminum switch box, which won't chip or rust.

4 Gallon Plastic Solution Tank

Dispenses liquid for scrubbing, polishing and diamond cutting. Won't rust or corrode. Standard on deluxe models.

"Select-A-Weight"[™] System

Includes two 10 lb discs and three 25 lb discs, allows operator to adjust surface pressure in 10 and 25 lb increments while staying within recommended amperage range.

Enhanced High Torque, Triple Planetary Gear System,

Permanently lubricated, operates at 140 RPM with 1 1/2 HP motor.

Reinforced* Aluminum Apron w/Lift Handle

For added strength and rigidity, also shields the transport wheels to prevent damage.



Wheel Support System*

Extra heavy-duty reinforced six point cast aluminum.

QuarryMaster[®] 17" / 20" / 24"

The QuarryMaster[™] is designed for the restoration and maintenance of marble, tile, terrazzo, stone and concrete. This versatile floor machine can also be used for standard floor scrubbing, stripping and polishing applications.

Built-In AMP Meter

Allows for constant monitoring of current draw and selection of the correct weight.

Flexible Dual Triggers

Left or right hand operation, non-conductive and have built-in safety lockouts to prevent accidental startup.

50 Ft. Power Cord

3-wire safety yellow with water-resistant jacket.



MCL-17E DLX



Diamond Disc Driver with the Unique "Splash Guard"[™] System

Includes five quick change diamond mounting pads and "Splash Guard"[™] skirt to contain slurry. Standard on deluxe models.