


# Continuous Duty Explosion Proof Vacuum DS 2720-EX

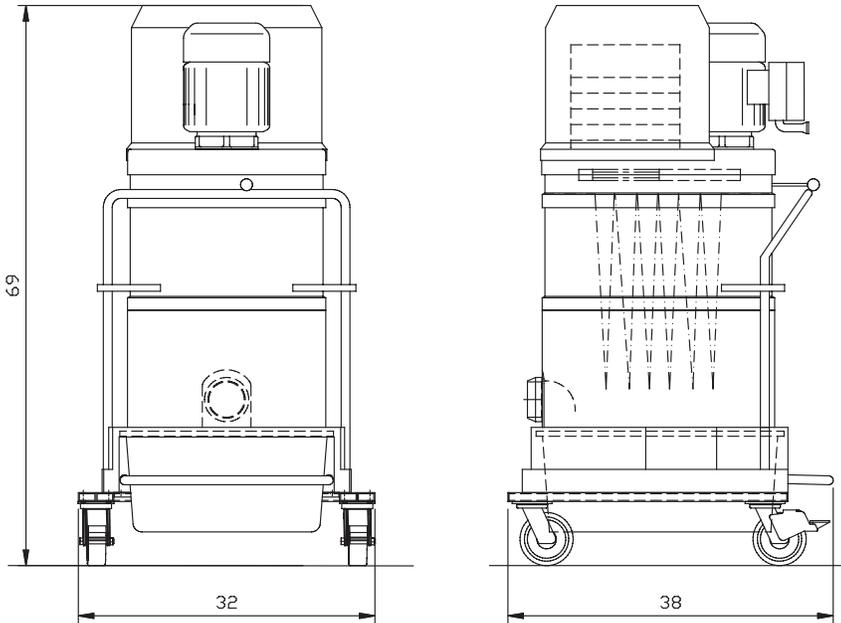

## DS2720-EX Standard Specifications

- 10 HP Explosion Proof TEFC Motor, 208-230, 460 Volt, 3-Phase, 60 Hz, 24, 12 Amps, 506 CFM
- Explosion Proof Motor Starter - Class I, Group D & Class II, Groups F & G Rated
- 48 ft<sup>2</sup> MicroClean Filter with Manual Shaker System
- 4" Inlet Connection with Aluminum Cast Deflector
- Two Multi-Stage Centrifugal High Performance Turbines w/ Relief Valve
- 24 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base with 6" Heavy Duty Double Anti-Static Casters
- Static-dissipating Compression Cast Housing

**Base Price<sup>1</sup>: DS2720-EX - \$15,847.10**

ADDER	DESCRIPTION	PRICE
25143	Minihelic for Filter Monitoring <sup>2</sup>	\$215.00
34878	Retractable Grounding Reel with Stainless Steel Clamp <sup>2</sup>	\$430.00
S	51 ft <sup>2</sup> HEPA Filter with Minihelic for DS2 Series <sup>1</sup>	\$1,575.00