


Certified
**EXPLOSION
PROOF**

Certified by ETL to meet UL standards for Class I, Div 1 and 2, Group D and Class II, Div 1 and 2, Group F & G.



FRV 1150

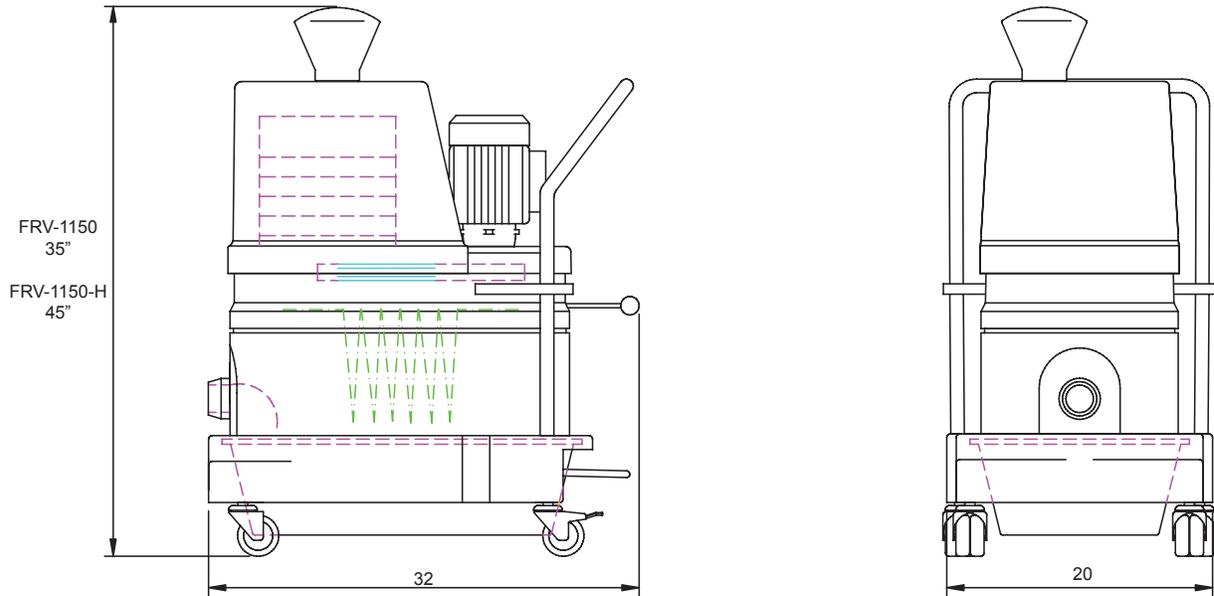

FRV 1150 Standard Specifications

- DS1-EX1150 NRTL Certified Explosion Proof Motor & Switch, Class I & Class II
- 2 HP Motor, 230/460 Volt, 6/3 Amp Three Phase, 60 Hz
- 13 ft² MicroClean BVSC Filter, Manual Shaker System
- 40 ft² HEPA Filter with Minihelic (optional)
- 2" (50mm) Inlet Connection with Bronze Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base, 3" Heavy Duty Conductive Casters
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 10⁻⁶ Ohms
- DEX Accessory Package 151510DEX: Vacuum Hose: 1.5" x 10', Urethane, Static Conductive,, Molded Carbon Impregnated Cuffs; Wand: 54", Aluminum Shaft, 2 Bends; Crevice Tool: 11", Aluminum Body; Round Brush: 3", Nylon Bristles, Static Conductive, Carbon Impregnated; Floor Brush: 14", Metal Body, Anti-Static Bristles; Reducer: 2" x 1.5".



Base Price: FRV 1150 - \$6,996.00

ADDER	DESCRIPTION	PRICE
35193	Explosion Proof HEPA Module	\$1,050.00
24000	Static Conductive Disposable Dustpan Liner with Lid	\$39.50
1560OHDEX	Overhead Cleaning Accessory Kit	\$425.00
-25	Optional - increase hose length to 25'	\$250.00
L-EX	Extended Caster Frame Assembly w/ Antistatic Casters	\$825.00