



*Certified*  
**EXPLOSION  
PROOF**

Certified by ETL to meet UL standards for Class I, Div 1 and 2, Group D and Class II, Div 1 and 2, Group F & G.



**EXPLOSION PROOF SERIES**

# FRV 1220

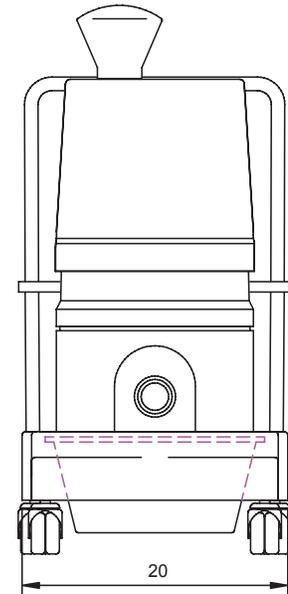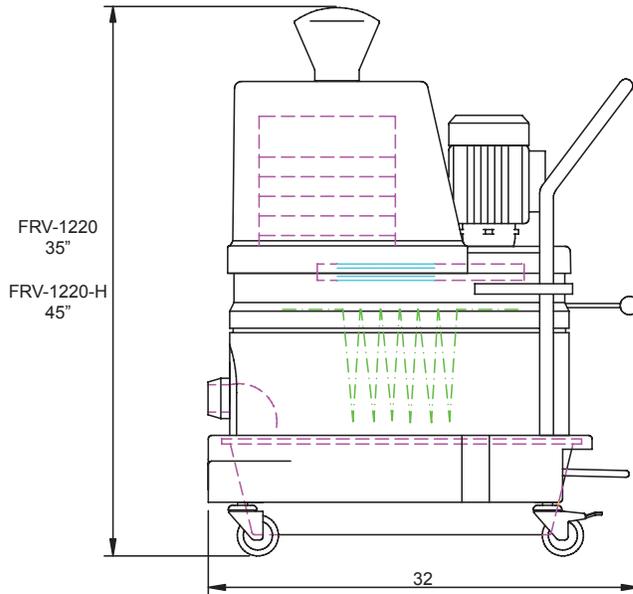

## FRV 1220 Standard Specifications

- DS1-EX1220 NRTL Certified Explosion Proof Motor & Switch, Class I & Class II
- 3 HP Motor, 230/460 Volt, 14/4 Amp, Three Phase, 60 Hz
- 13 ft<sup>2</sup> MicroClean BVSC Filter, Manual Shaker System
- 40 ft<sup>2</sup> HEPA Filter with Minihelic (optional)
- 2" (50mm) Inlet Connection with Bronze Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base, 3" Heavy Duty Conductive Casters
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 110<sup>6</sup> Ohms
- DEX Accessory Package 151510DEX: Vacuum Hose: 1.5" x 10', Urethane, Static Conductive,, Molded Carbon Impregnated Cuffs; Wand: 54", Aluminum Shaft, 2 Bends; Crevice Tool: 11", Aluminum Body; Round Brush: 3", Nylon Bristles, Static Conductive, Carbon Impregnated; Floor Brush: 14", Metal Body, Anti-Static Bristles; Reducer: 2" x 1.5".



FRV 1220



**Base Price: FRV 1220 - \$7,055.50**

ADDER	DESCRIPTION	PRICE
35193	Explosion Proof HEPA Module	\$1,050.00
24000	Static Conductive Disposable Dustpan Liner with Lid	\$39.50
1560OHDEX	Overhead Cleaning Accessory Kit	\$425.00
-25	Optional - increase hose length to 25'	\$250.00
L-EX	Extended Caster Frame Assembly w/ Antistatic Casters	\$825.00