



Certified
**EXPLOSION
PROOF**

Certified by ETL to meet UL standards for Class I, Div 1 and 2, Group D and Class II, Div 1 and 2, Group F & G.

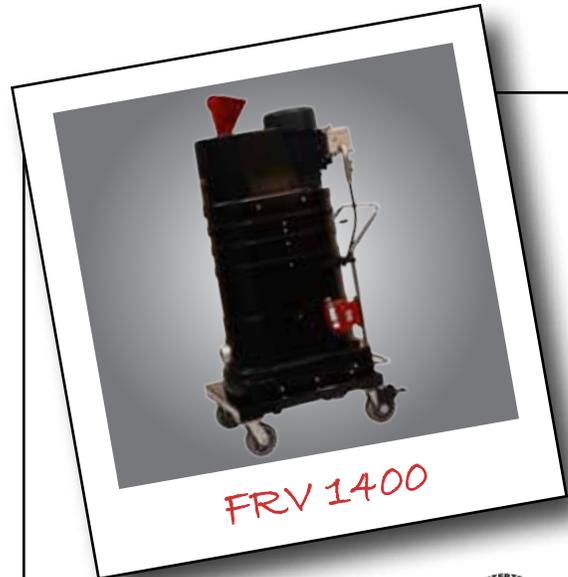

FRV 1400

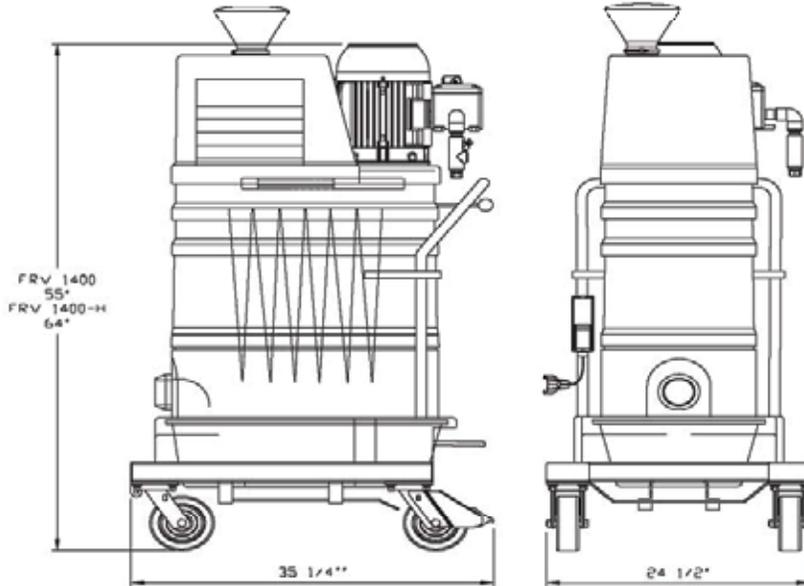

FRV 1400 Standard Specifications

- DS1-EX1400 NRTL Certified Explosion Proof Motor & Switch, Class I & Class II
- 5 HP Motor, 230/460 Volt, 17/7 Amp, Three Phase, 60 Hz HP Motor, 230/460 Volt, 6/3 Amp Three Phase, 60 Hz
- 25' Retractable Grounding Reel with Stainless Steel Clamp
- 28 ft² MicroClean BVSC Filter, Manual Shaker System
- 40 ft² HEPA Filter with Minihelic (optional)
- 2.75" (50mm) Inlet Connection with Bronze Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- 6" Heavy Duty Frame Assembly
- 25' Retractable Grounding Reel
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 10⁻⁶ Ohms
- Inlet Reducer, 2 3/4"-2" with Button Lock Included
- DEX Accessory Package 202025DEX



Accessory Package Includes: Vacuum Hose: 2" x 25', Urethane, Static Conductive, Smooth Bore Hose; Wand: 45", Stainless Steel, Single Bend; Crevice Tool: 15", Stainless Steel; Floor Tool: 20", Aluminum Cast w/ Rollers, Rubber Strips; Hose Connector: 2" Male End.

Base Price: FRV 1400 - \$9,550.50

ADDER	DESCRIPTION	PRICE
35193	Explosion Proof HEPA Module	\$1,050.00
24000	Static Conductive Disposable Dustpan Liner with Lid	\$39.50
1560OHDEX	Overhead Cleaning Accessory Kit	\$425.00