
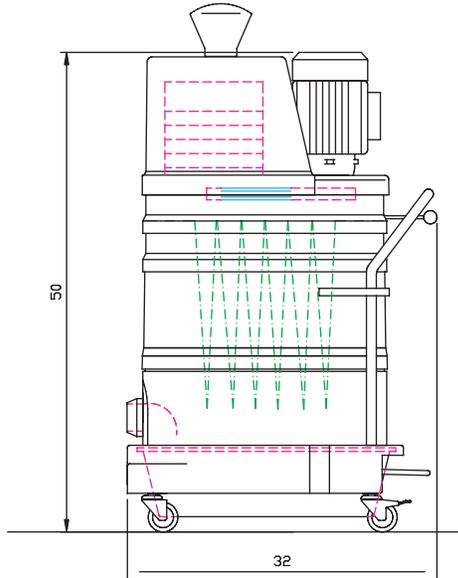


Continuous Duty Vacuum **WORKHORSE** DS 1400

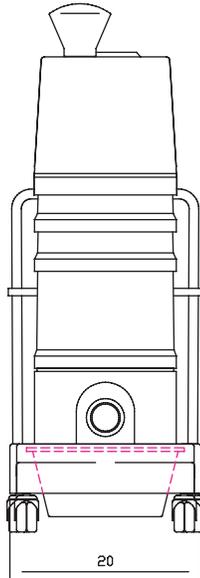

DS 1400

DS 1400 Standard Specifications

- 5 HP TEFC Motor, 208-230, 460 Volt, 3-Phase, 60 Hz, 12, 6 Amps
- Motor Starter - Class 10 Motor Overload Protection
- 28 ft² MicroClean Filter with Manual Shaker System
- 2.75" (70mm) Inlet Connection with Aluminum Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base, 3" (76mm) Heavy Duty Conductive Casters
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 10⁻⁶ Ohms

Base Price¹: DS 1400 - Call for Pricing

ADDER	DESCRIPTION
B	40 ft ² HEPA Filter with Minihelic ¹
35230B	Active Charcoal Filter Assembly, 20 lbs. of media ²
9953B	Motorized Filter Shaker with Switch, 3-Phase ²
18630B	Reverse Pulse with Electronics & Pressure Gauge ²
25143	Minihelic for Filter Monitoring ²
34878	Retractable Grounding Reel with Stainless Steel Clamp ²
1302120	Extended Caster Assembly with Two 6" Swivel & Two 6" Rigid Casters with Brakes ²